

m

tö

SHS | Le "U2• ÑQ7±&1 5"ö of" Đ

### Electric screw drive

Independent electric screw drive brings you both plasticization and energy efficiency.

### Pressure hold valve


With the advanced pressure hold technology, the system makes the plasticization and pressure hold at the same time therefore has a better cycle time for production.

### Reliable clamping

PET

Special design for PET preform mold, which ensure the fast clamping movement and uniformly forced of the mold.

### Proportional valve control

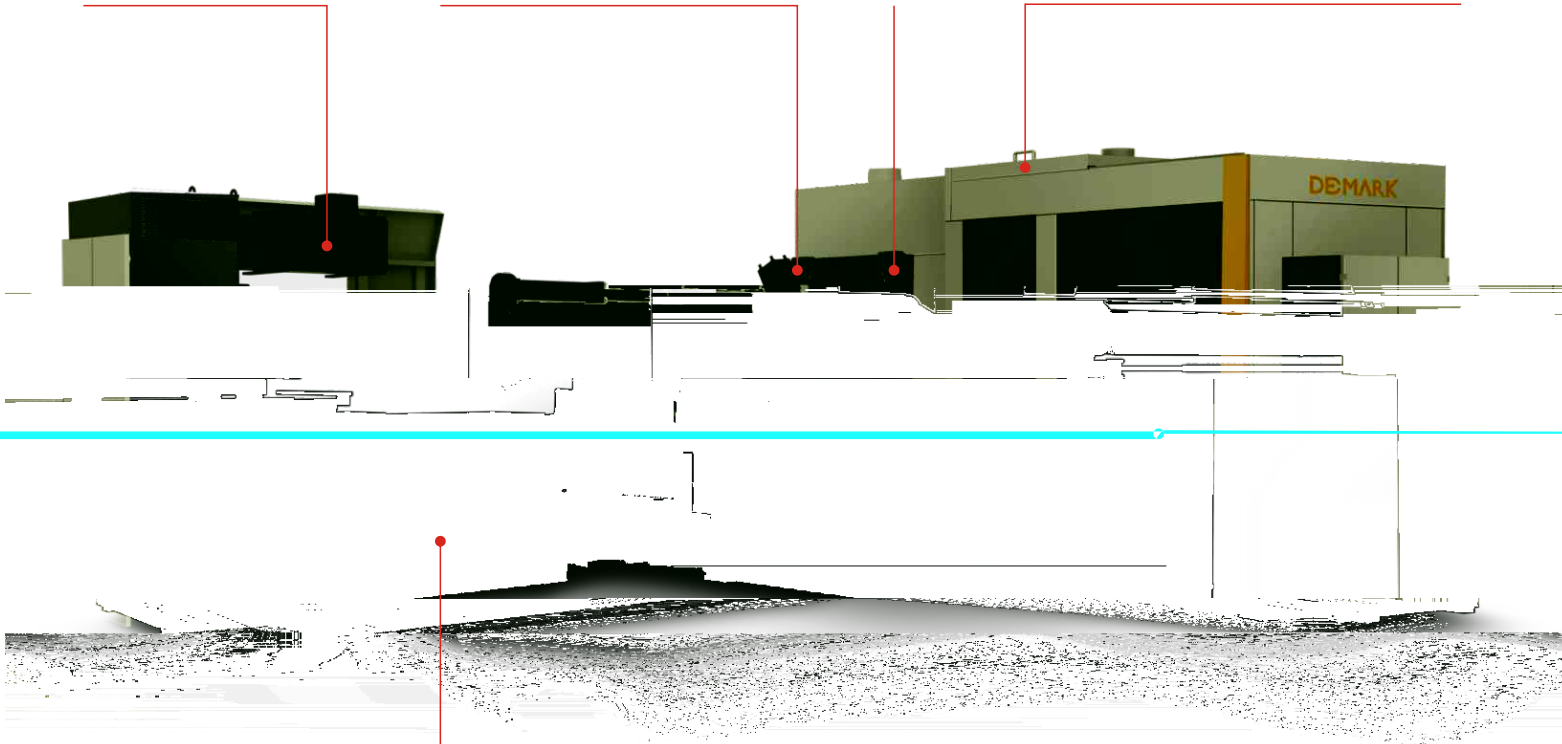


g, R"-Ó  
o |T

### Servo motor drive hydraulic system

The hydraulic system was driven by a servo motor which ensure the lower energy consumption and sufficient hydraulic power supply.

1 0 10 4 @ Q p r  
Ser

# 西门子控制系统 SIEMENS control system

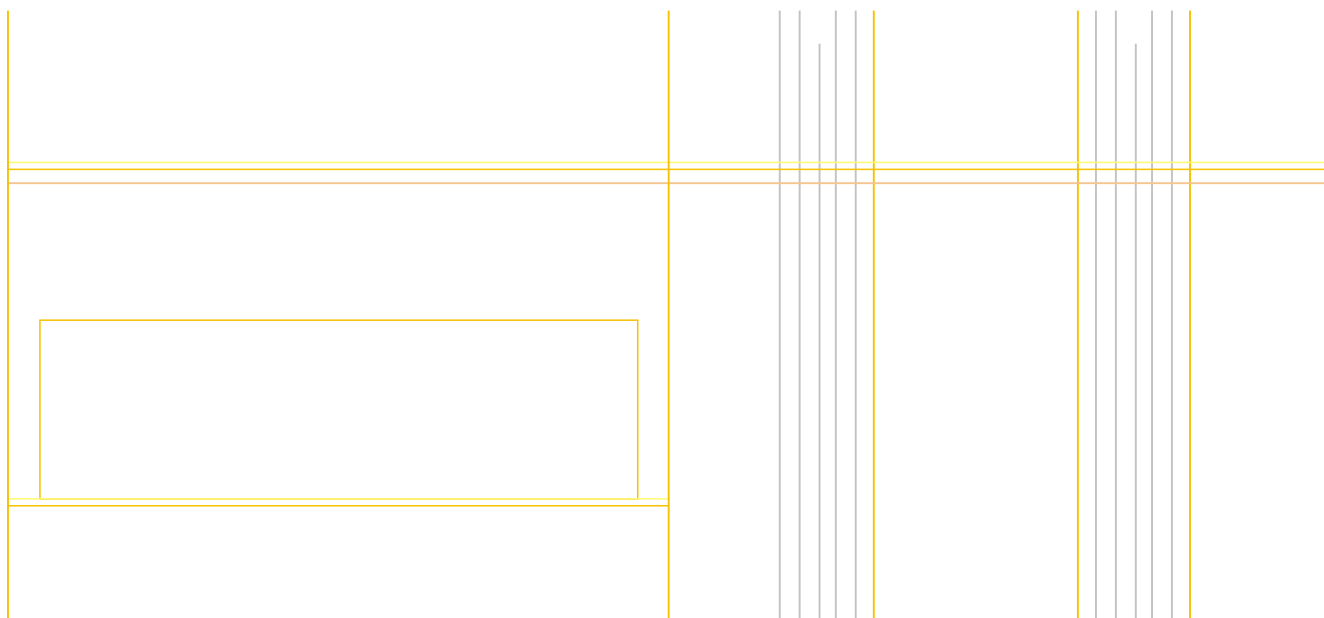

MODEL		ECO260/2000	ECO260/2500	ECO350
	L/D	25	25	25
	mm	80	90	90
PET)	g	2000	2500	2500
PET)	g/s	80	110	110
	T	260	260	260
	mm	540	540	540
/	mm	200-580	200-580	200-580
( x )	mm	570x570	570x570	570x570
	mm	150	150	150
	T	8	8	8
	pcs	1	1	1
	pcs	1	1	1
	N	1	1	1
	KW	1	1	1
	KW	1	1	1
	h	1	1	1
	h	1	1	1
( x x				
	supply (3-phase AC)			
	Chilling Water			
	mm	100	100	100
	mm	25	25	25
	mm	0.3	0.3	0.3
	mm	120	120	120
	mm	0.7-0.9	0.7-0.9	0.7-0.9
	mm	800	800	800
	mm	400	400	400
	mm	860x160x240	880x170x250	1020x210x250
	mm	14	17	18

